



ALPHA 40

Curvatrice a tre rulli trascinatori
Bending machine with three driving rolls




Rivenditore / Dealer




tauring
TOP PERFORMING


www.tauringroup.com




8 ton
76 kN




3



40 mm




95 mm




137 mm

147 mm




115 mm


115 mm




7,7 min⁻¹
15,6 min⁻¹




4,4 kW




120 cm



93 cm



69x115x110 cm




490 Kg

Capacità Massime di Curvatura Maximum Bending Capacities

Le prestazioni sono riferite a materiale tipo S275JR (Rm=400 N/mm²)
The capacities are referred to type of material S275JR (Rm=400 N/mm²)

	in mm	Min. R.	Tools
1a	60 x 15 60 x 20	130 300	ST ST - SI
1b	50 x 8 50 x 10	300 300	ST ST - SI
2a	25 28	250 600	ST ST - SI
3a	50 x 50 x 5 50 x 50 x 7	300 500	ST - SI ST - SI
3b	40 x 40 x 4 45 x 45 x 5	300 600	ST - AI ST - AI
5a	60 x 30 x 5,5 45 x 45 x 6	250 500	ST ST - SI
5b	60 x 30 x 5,5 45 x 45 x 6	300 600	ST ST - SI
6a	50 x 25 x 5 60 x 30 x 6	250 400	ST - SI ST - SI
6b	50 x 25 x 5 60 x 30 x 6	250 500	ST - SI ST - SI
9a	50 x 1,8 60 x 2	700 800	RT RT - SI
9b	33,7 x 2,6 (1") 48,3 x 2,9 (1,5")	250 300	RT RT - SI
9c	28 30	150 300	RT RT - SI
10a	50 x 25 x 2,5 60 x 30 x 2,5	700 1000	RQ - SI RQ - SI
10b	40 x 20 x 2,5 50 x 25 x 2,5	600 700	RQ RQ - SI
11a	40 x 40 x 2 45 x 45 x 2,5	600 1000	RQ RQ - SI

ACCESSORI - ACCESSORIES ACCESSOIRES - AUSRÜSTUNG ACCESORIOS

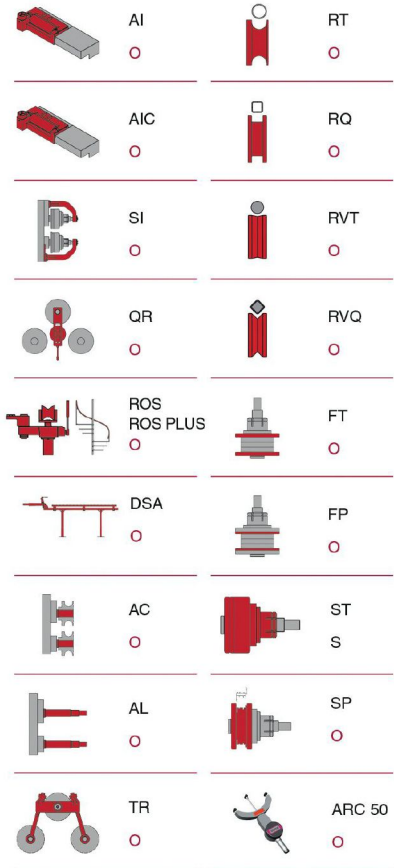

S: Standard O: Optional